


Jumbo Flex

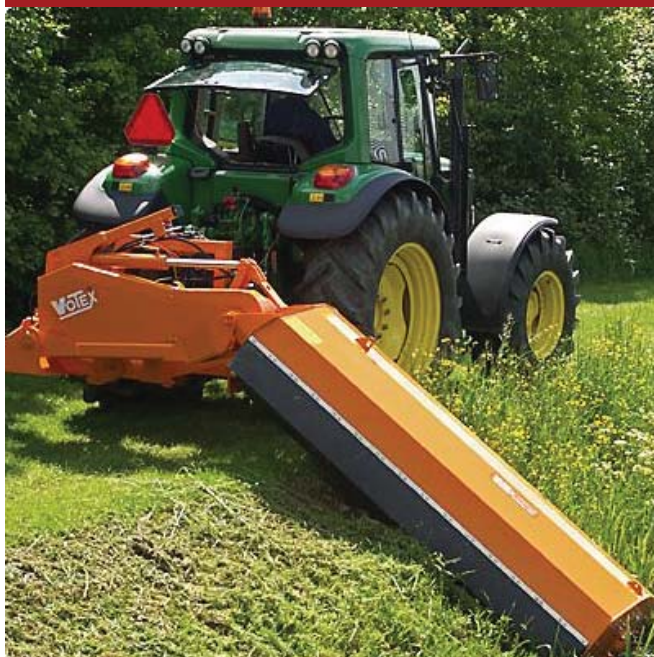

Professional versatile flail mower

The Votex Jumbo Flex has the same characteristics as the Jumbo, but has a turnable yoke. By turning the yoke to the left, it is also possible to mow shallow ditches with wide mowing heads. With this feature the Jumbo Flex is the high capacity side flail mower that is deployable in almost any circumstances.

Specifications	120	150	190	230	260
Chassis					
Category	II/III				
Mounting	Rear				
Safety break back system	Mechanically to front and rear				
Side shift	Hydraulically by SWING-ON-LINE®				
Max. displacement (cm)	60				
Max. reach relative to axis tractor (cm)	274	310	346	382	418
Mowing angle (°)	-60 to +90				
Mowing head					
Model mowing head	Ecomow				
Flails					
Weight 40x12 (g)	325				
Amount 40x12 flails	36	48	60	72	84
Weight hammer flail (g)	1.300				
Amount hammer flails	12	16	20	24	28
Power train					
Minimum PTO power (kW//HP)	35/48	40/55	50/68	60/82	70/95
PTO speed (RPM)	540/750/1000				1000
Gearbox	Silent box with spiral toothing				
Dimensions					
Cutting width (cm)	109	145	181	217	253
Overall width (cm)	190				
Weight (kg)	1.055	1.110	1.165	1.225	1.370

